



Eris® Pro 6

High-Definition Coaxial Monitors

Key Features

- Single point-source coaxial design for wider sweet spot and better phase alignment
- 6.5-inch woven composite low-frequency driver
- 1.25-inch, silk-dome, high frequency driver
- 140W, Class AB amplification
- 35 Hz to 20 kHz frequency response
- 106 dB Peak SPL (@ 1 meter)
- Acoustic Tuning Controls
- Wall and ceiling mountable



The **Eris Pro 6** reference monitors employ a single point-source coaxial design for clear and accurate sound reproduction. This design provides superior phase alignment between components and delivers a wide sweet spot, precise stereo imaging, and symmetrical dispersion patterns – unique advantages for Dolby Atmos immersive rooms as well as stereo mix environments.

The Eris Pro 6 also delivers finely detailed transient response, and stunning dynamics that delivers a natural and less fatiguing experience. A 1.25-inch ultra-low mass, silk-dome tweeter ensures snappy, accurate transient reproduction, while a 6.5-inch woven-composite woofer offers tight, clear bass, with plenty of punch and no flab. A ported enclosure and 140 Watts of power allows the Eris Pro 6 to reach down to an astonishing 35 Hz.


Acoustic tuning controls let you configure the Eris Pro 6 for your room and three-way Acoustic Space tuning can compensate for the effects of speaker placement against a wall or in a corner.

Flexible input options let you connect almost any line-level source, from mixers to audio interfaces and more. You'll have no problem hooking your Eris speakers up to virtually anything. Lastly, provisions for wall and ceiling mounts make it easy to integrate Eris Pro 6 monitors into any stereo or multi-channel system.

Sold Individually.

Technical specifications

Frequency Response	35 Hz to 20 kHz
Peak SPL	106 dB (@ 1M)
LF Amplifier Power	75W, Class AB
HF Amplifier Power	65W, Class AB
LF Driver	6.5-inch woven composite
HF Driver	1.25-inch, silk-dome
Inputs (1 each)	Balanced XLR Balanced ¼-inch TRS Unbalanced RCA
Controls	Volume High Frequency Mid Frequency Acoustic Space Low Cut Power Saver
Dims (H x W x D)	11.42" x 9.45" x 11.18" (290mm x 240mm x 284mm)
Weight	16.98 lbs (7.7 kg)

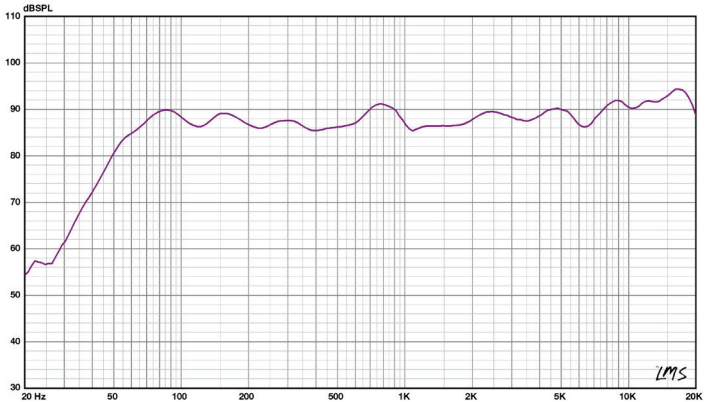

Part Number	Description	UPC Code
2777500130	ERIS PRO 6	673454011443
2777503130	ERIS PRO 6 AU	673454011450
2777504130	ERIS PRO 6 UK	673454011481
2777506130	ERIS PRO 6 EU	673454011467
2777507130	ERIS PRO 6 JP	673454011474
2777514130	ERIS PRO 6 MX	673454012136