


HEADWORN MICROPHONES

Product Specification




HM-500(S/B)
Unidirectional

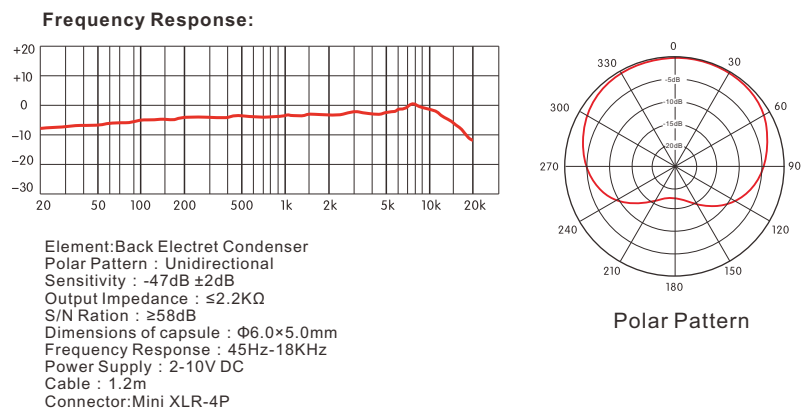

Element:Back Electret Condenser
Polar Pattern : Unidirectional
Sensitivity : -47dB ±2dB
Output Impedance : ≤2.2KΩ
S/N Ration : ≥58dB
Dimensions of capsule : Φ6.0×5.0mm
Frequency Response : 45Hz-18KHz
Power Supply : 2-10V DC
Cable : 1.2m
Connector:Mini XLR-4P




HM-P06
Unidirectional

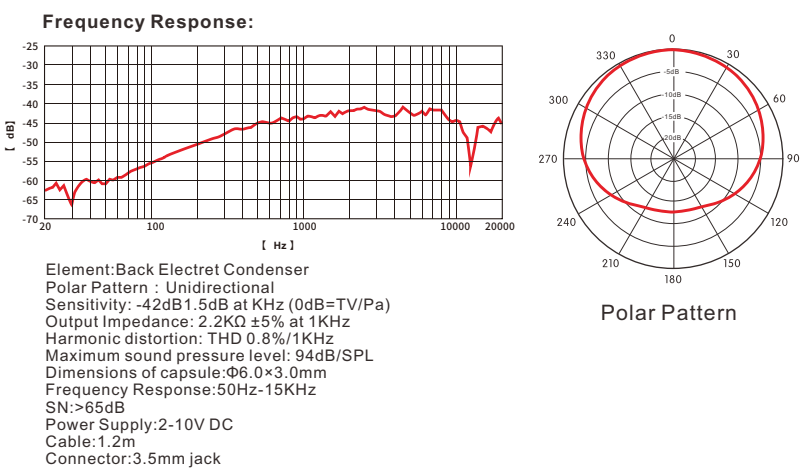

Element:Back Electret Condenser
Polar Pattern : Unidirectional
Sensitivity: -42dB1.5dB at KHz (0dB=TV/Pa)
Output Impedance: 2.2KΩ ±5% at 1KHz
Harmonic distortion: THD 0.8%/1KHz
Maximum sound pressure level: 94dB/SPL
Dimensions of capsule:Φ6.0×3.0mm
Frequency Response:50Hz-15KHz
SN:>65dB
Power Supply:2-10V DC
Cable:1.2m
Connector:3.5mm jack



HM-600(S/B)
Omnidirectional

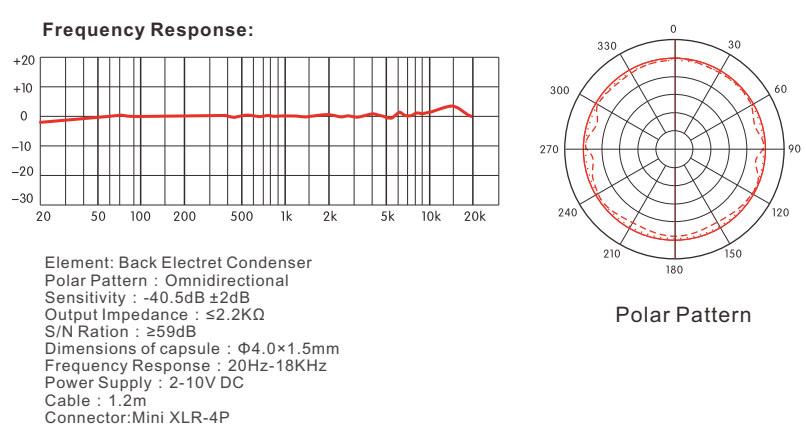


Element: Back Electret Condenser
Polar Pattern : Omnidirectional
Sensitivity : -40.5dB ±2dB
Output Impedance : ≤2.2KΩ
S/N Ration : ≥59dB
Dimensions of capsule : Φ4.0×1.5mm
Frequency Response : 20Hz-18KHz
Power Supply : 2-10V DC
Cable : 1.2m
Connector:Mini XLR-4P

LAVALIER MICROPHONES

Product Specification




LM-C460
Unidirectional

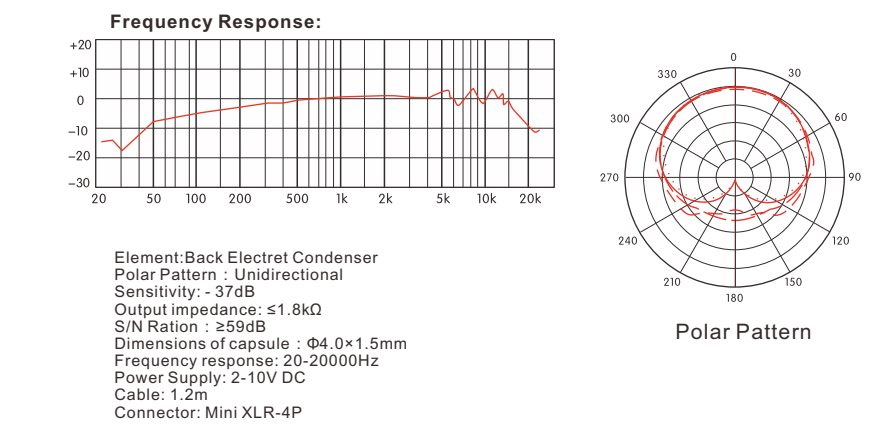

Element:Back Electret Condenser
Polar Pattern : Unidirectional
Sensitivity: -37dB
Output impedance: ≤1.8kΩ
S/N Ration : ≥59dB
Dimensions of capsule : Φ4.0×1.5mm
Frequency response: 20-20000Hz
Power Supply: 2-10V DC
Cable: 1.2m
Connector: Mini XLR-4P




LM-C480
Unidirectional

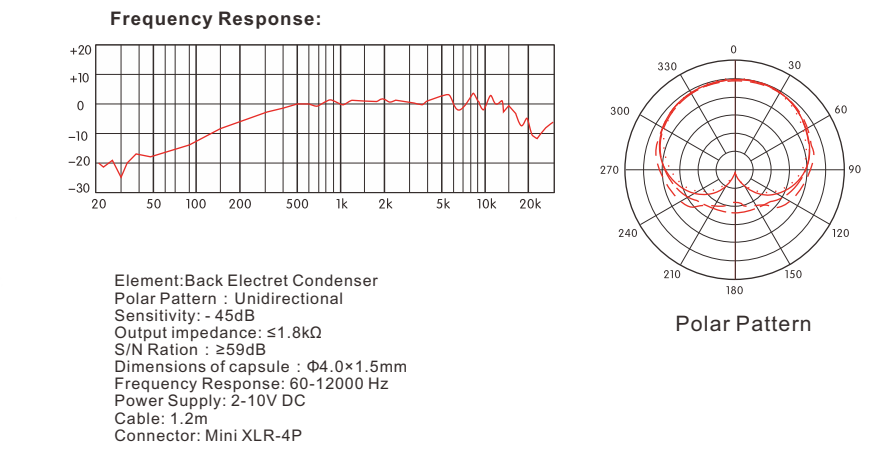

Element:Back Electret Condenser
Polar Pattern : Unidirectional
Sensitivity: -45dB
Output impedance: ≤1.8kΩ
S/N Ration : ≥59dB
Dimensions of capsule : Φ4.0×1.5mm
Frequency Response: 60-12000 Hz
Power Supply: 2-10V DC
Cable: 1.2m
Connector: Mini XLR-4P



LM-C550
Omnidirectional

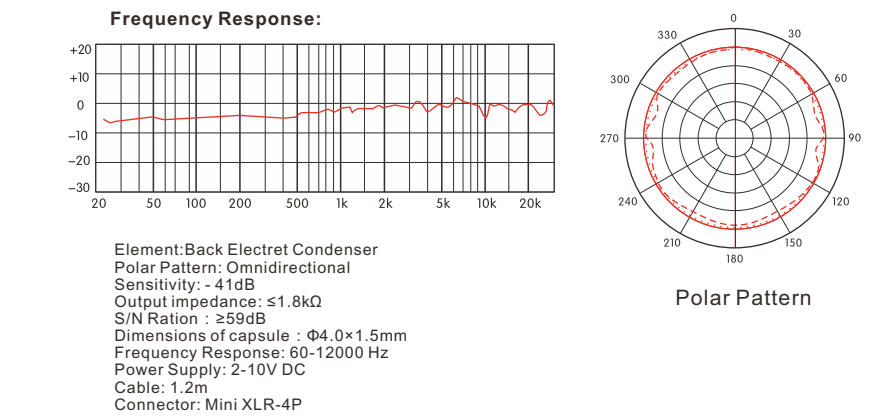

Element:Back Electret Condenser
Polar Pattern: Omnidirectional
Sensitivity: -41dB
Output impedance: ≤1.8kΩ
S/N Ration : ≥59dB
Dimensions of capsule : Φ4.0×1.5mm
Frequency Response: 60-12000 Hz
Power Supply: 2-10V DC
Cable: 1.2m
Connector: Mini XLR-4P